

**AD22-16C
PILOTO REDONDO DE LED**




Voltage

- DC.AC6V
- DC.AC12V
- DC.AC24V
- DC.AC36V
- DC.AC48V
- DC.AC110V
- DC.AC127V
- AC220V
- AC380V



AD22-16DC Ø16

AD22-16DC Ø16	●
	●
	●
	○
	●

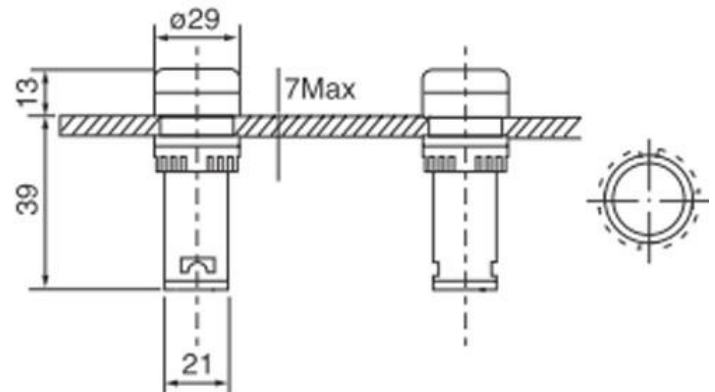

LED Type Indicator

Environment condition

- (1) Ambient temperature: $-25^{\circ}\text{C} \pm 55^{\circ}\text{C}$
- (2) Relative humidity: 98%
- (3) Working under vibration frequency 2-80Hz, acceleration at 0.7g
- (4) Pollution: class III installation: type III
- (5) "TH" mark can be used in wet and heat conditions

Main Specifications

- (1) Dielectric Property: 2.5kV, 1min
- (2) Insulation Resistance $> 2\text{M}\Omega$
- (3) AC Indicative Light Voltage $\pm 20\%$
- (4) Endurance $> 30000\text{h}$
- (5) Brightness $> 60\text{cd}/\text{m}^2$
- (6) Leakage Index: CT1 ≥ 100
- (7) Top protection class IP65, special order IP67
- (8) Frequency: AC 50-60Hz